

# Study of Wireless Sensor Networks as a Software Engineering Approach

Pankaj Nagar, Kripa Shanker Chaturvedi

**Abstract** – Software development for wireless sensor networks requires novel programming paradigms and technologies. This article describes the concept of new service oriented software architecture for mobile sensor networks. With this architecture, a flexible, scalable programming of applications based on an adaptive middleware is possible.

The middleware supports mechanisms for cooperative data mining, self-organization, networking, and energy optimization to build higher-level service structures. The purpose of our research activities is the development of a framework, which radically simplifies the development of software for sensor network applications.

**Index Terms:**- JINI, Middleware, Reflective Middleware, TinyOS.

## I. INTRODUCTION

In future, the increasing miniaturization of electronic components and advances in modern communication technology make the development of powerful spontaneously networked and mobile systems possible. In the next 15 years, *wireless sensor networks* have an enormous economical potential, if the research issues stated in this work can be solved satisfactorily.

*Sensor networks* consist of a huge number of small *sensor nodes*, which communicate wirelessly. These sensor nodes can be spread out in hard accessible areas by what new applications fields can be pointed out. A sensor node combines the abilities to compute, communicate and sense. The aim is to fit all mentioned features in a single chip solution. In principle, controlling of an *actuator* is possible, too. Fig.1 shows the structure of a sensor node. The development of sensor nodes is influenced by

- Increasing device complexity on microchips,
- High performance wireless networking technologies,
- A combination of digital signal processing and sensor data acquisition,
- Advances in the development of micro electromechanical systems (MEMS),
- Availability of high performance development tools.

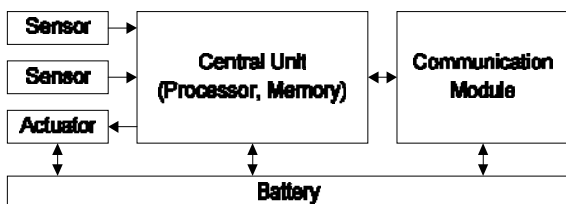


Fig.1 Structure of a Sensor Node

The use of energy-efficient components and procedures in sensor nodes is important for the lifetime of network nodes. The application fields of sensor nodes are determined by processor performance, transmission range, radio sensitivity, power consumption, weight, and size. Possible applications are medical monitoring of various health parameters (intra and extra-corporal), environment monitoring, control of industrial machines and devices.

Well-known research activities in the field of sensor networks are UCLA's WINS [18], Berkeley's smart-dust [15], WEBS [16], and PicoRadio [17]. An example of European research activities is the EYES-Project [19]. Detailed surveys on sensor networks can be found in [20] and [21].

The remainder of the paper is organized as follows. The requirements of sensor networks are discussed in detail in Section II. Section III explains aspects of software development and points out existing solutions. In Section IV, a new concept of software architecture for sensor networks is presented; Section V describes the associated software development design flow. Section VI concludes this paper with an outlook on future research activities.

## II. SENSOR NETWORK REQUIREMENTS

Besides application-specific tasks of a node, the entire network requires an adaptation to dynamical system requirements. The development focus changes from the single result of a sensor node to the cumulative result of the network. Consequentially, the following requirements for the design and implementation process of sensor networks arise:

1. Sensor networks have to be **self-organizing**.
2. **Cooperative processing** of tasks should lead to more precise results and new application fields.
3. Sensor networks require **security mechanisms** that are adaptive to environmental conditions.
4. All algorithms and protocols must be **energy optimized**.

These requirements are described in detail in the following subsections.

### A. Self Organization

#### A.1 Network Setup

The enormous number of nodes in sensor networks requires sophisticated solutions for the automatic organization of the network. A manual boot procedure by an administrator is nearly impossible. Therefore, the software of

1. Dr.PankajNagar, Asstt.Professor,Deptt.of Statistics, University of Rajasthan, Jaipur, India (e-mail:pnagar121@gmail.com)  
2. KripaShankerChaturvedi, ReserchScholar, Deptt.of Statistics, University of Rajasthan, Jaipur, India (e-mail:kripa.chaturvedi@gmail.com)

a node has to autonomously set-up an operating network infrastructure by interaction with its neighboring nodes. For self-organizing networks, the knowledge of the current context (*context awareness*) is important. During set-up phase, infrastructure context (perception of network bandwidth and reliability) and domain context (relations between the network participants) are primarily important. The current system context e.g., the knowledge of data sinks of the system, is necessary for a sensor node to operate correctly. This context can change permanently because of the mobility of nodes, therefore update mechanisms have to be considered.

## A.2 Network Maintenance

Software development for wireless sensor networks requires novel programming *paradigms* and technologies. Conventional principles of communication are mostly inapplicable due to dynamic topology and the need for cooperative task processing in sensor networks.

Traditional wired networks are usually based on the client-server-principle, with the client sending a request and the server replying. However, communication in sensor networks should be event-based: Exceeding a threshold value at a specific node triggers an event that is forwarded to data sinks. Contrary to conventional communication via *request-reply*, energy-dissipating polling can be avoided [5].

Node addressing in wireless sensor networks differs from the approach in wired networks. For sensor networks, explicit node addressing via ID or IP is unfavorable since random node distribution and mobility impedes assignment of node addresses to the position of a measurement. Since we do not need to communicate with a specific node described by its address, we use an addressing mechanism called *attribute-based-naming* [6]. A satisfying request processing requires a node's position and its context. An example for a network request could be: „What is the temperature at location (x,y)?“.

In large sensor networks, packets have to be routed from data sources to data sinks over intermediate nodes. That means, besides the measurement task, all nodes have to perform additional tasks to maintain network integrity. These tasks considerably affect the lifetime and functionality of a sensor node. For the design and implementation of sensor network software, special techniques have to be used to find trade-offs between task processing, network functionality and lifetime of nodes.

A potential approach could be the strategy of communication *avoidance* resp. *communication reduction* e.g., through context-dependent routing. The decision for a specific routing algorithm depends on several criteria, such as mobility, network load, transmission delay, or energy consumption. In terms of energy consumption, a reactive routing protocol can outperform a proactive one, since routes are only established on demand. For static networks and high network loads, a proactive routing algorithm can be more applicable than a reactive one. An optimal routing algorithm for wireless sensor networks should adapt its strategy to the mobility of nodes. A review and comparison

of current routing protocols for mobile ad-hoc networks are given in [22] and [23].

## B. Cooperative Algorithms

Compared to networked macro sensors, an advantage of wireless sensor networks is the possibility to implement cooperative algorithms. A potential application for these algorithms is the reduction of network traffic by data preprocessing and aggregation. For a sensor application, it is not important whether a data aggregation is performed within the node itself or by a neighboring node. However, communication directed to data sinks has to be minimized since data sinks are usually located far away. An example for a cooperative algorithm is *location determination* by triangulation. This algorithm needs at least measurements from three different nodes. Computed positions then can be used for addressing or routing.

## C. Security Mechanisms

The selection of proper security mechanisms for wireless sensor networks depends on network application and environmental conditions. Additionally, the resources of sensor nodes (processor performance, memory capacity and energy) have to be taken into account.

Besides the standard security requirements, such as availability, confidentiality, integrity, authentication, and non-repudiation, special security requirements for wireless sensor networks, such as message freshness, intrusion detection, intrusion tolerance, or containment exist [24].

To fulfill the security requests mentioned above, adapted security mechanisms for wireless sensor networks have been developed and tested by several research groups [12]. A main task for sensor node software is the selection and management of security mechanisms depending on security policies defined by the operator of a sensor network.

## D. Energy Efficient Approach

Sensor nodes are typically battery-driven, however too small and too numerous to replace or recharge batteries. Moreover, micro sensor networks are often deployed in remote or dangerous environment. Hence, the increase of the lifetime of sensor nodes is a main design and implementation challenge.

Microcontroller hardware used for sensor nodes provides manifold power saving techniques. One of these is Dynamic Power Management (DPM). DPM switches off hardware components that are not needed and uses clock scaling.

An Operating System (OS) for sensor nodes should implement a low-power task-scheduling. A scheduling algorithm for example could take advantage of nonlinear battery effects to reduce energy consumption [14]. Furthermore, a proper selection of communication protocols can additionally reduce energy consumption. The most promising layers for energy savings are physical-, link- and network layer.

### III. SOFTWARE ENGINEERING

For the development of application software for sensor networks, the use of a component based framework is desirable. The components of the framework provide the functionality of single sensors, sensor nodes, and the whole sensor network. According to these components, applications are classified into *sensor applications*, *node applications* and *network applications*.

A *sensor application* contains the readout of a sensor as well as the local storage of data. It has full access to the hardware and is able to access the operating system directly. The sensor application provides essential basic functions of the local sensor node, which may be used by the node application.

The *node application* contains all application specific tasks and functions of the middleware to build up and maintain the network e.g., routing, looking for nodes, discovering services, and self localization.

The *sensor network application* describes the main tasks and required services of the entire network without assigning any tasks or services to individual nodes. It represents an interface to the administrator to evaluate the network results.

The purpose of our research activities is the development of a framework, which radically simplifies the development of software for sensor-, sensor node-, and sensor network applications. It provides support for distribution, configuration, scalability and portability. The framework should contain a middleware that allows machine-intimate programming of embedded systems. Thereby, the programming effort is reduced.

#### A. Current Software Architectures of Small Distributed Devices with Wireless Network Connection

For embedded systems, solutions already exist, which support service architectures and context awareness. In [10] the distributed middleware infrastructure GAIA is presented. It features coordination of software units and heterogeneous networks. The network appears to the environment as a single enclosed device. Because of the use of CORBA, XML, SQL and JAVA, GAIA is not an efficient choice for sensor networks because of its resource requirements.

Another approach is Tiny-OS that already provides an advanced framework for sensor networks [3]. It is optimized in terms of memory usage and energy efficiency. Tiny-OS [11] provides mechanisms (events and components) to statically define linking between layers. The predefinition of needed instances at compile time prevents from dynamical memory allocation at runtime. Tiny-OS supports the execution of multiple threads and provides a variety of additional extensions like the virtual machine Maté [2] and the database TinyDB for cooperative data acquisition. Services are currently not provided. Programs for Maté are precompiled and, because of the minimal instruction set, very short. They can be carried in a single Tiny-OS data packet of a maximum length of 24 bytes. Thus, Maté allows a dynamical adaptation of the node application at runtime.

The open and platform independent architecture OSGI is suggested in [9] for services in embedded systems. However, OSGI is not appropriate for sensor networks due to its very high resource demands. Therefore, it is mandatory to develop a service architecture that features minimal resource consumption.

As a general rule, services have, at least partly, to be executed locally to start communication to the service provider. The execution can take place in native code or in an adapted virtual machine.

#### B. Characteristics of a Middleware for Sensor Networks

The term *middleware* refers to the software layer between operating system and sensor application on the one hand and the distributed application which interacts over the network on the other hand. Primary objective of the middleware layer is to hide the complexity of the network environment by isolating the application from protocol handling, memory management, network functionality and parallelism [13]. A middleware for sensor networks has to be:

- Scalable
- Generic
- Adaptive
- Reflective

Resource constraints (memory, processing speed, bandwidth) of available node hardware require an optimization of every node application. Optimization is performed at compile time. Thereby, the application is reduced to all essential components and data types and interfaces are customized (*scalable middleware*).

The components of the middleware require a generic interface in order to minimize customization effort for other applications or nodes. The use of identical middleware components in different applications leads to a higher number of complex interfaces. Reducing this overhead is the objective of a *generic middleware*. It is important to customize interfaces to the application in contrast to customize the application to common interfaces. As example, a middleware function Set Baud rate (int transmitter, long baud rate) identifies the network interface with its first parameter. However, a node that has only one interface does not need this parameter. Consequently, knowledge of this information at compile time can be used for optimization.

Another possibility is to change the semantics of data types. A potential use case is the definition of accuracy of addresses that results in a change of data type's width. The width of a data type has vital influence on network traffic. Besides hardware-oriented optimization, an application specific data type optimization exists.

The mobility of nodes and changes of infrastructure require adaptations of the middleware at runtime depending on the sensor network application. The middleware must be able to dynamically exchange and run components (*adaptive middleware*).

Reflection covers the ability of a system to understand and influence itself. A reflective system is able to present its own behavior. Thereby, two essential mechanisms are distinguished – the inspection and the adaptation of the own

behavior [1][4]. Inspection covers ways to analyze behavior e.g., with debugging or logging. Adaptation allows the modification of internal layers to change the behavior presented to the application. In contrast to an adaptive middleware, a *reflective middleware* does not exchange components but changes their behavior. An example of reflective behavior is the modification of the routing strategy depending on mobility. The interface between the software layers remains constant.

C. Services in Sensor Networks

Besides the native network functions, such as routing and packet forwarding, future service architectures are required enabling location and utilization of services. A service is a program which can be accessed about standardized functions over a network. Services allow a cascading without previous knowledge of each other, and thus enable the solution of complex tasks.

A typical service used during the initialization of a node is the localization of a data sink for sensor data. Gateways or neighboring nodes can provide this service. To find this service, nodes use a service discovery protocol.

JINI is an emerging technology for desktop applications, but for sensor networks unsuitable due to resource requirements. Sun Microsystems suggests the surrogate host architecture for embedded systems [7], [8]. This is primarily suitable for systems that are controlled by an IP based network. The client can access non-standardized services in a sensor network by inquiring a proxy server. The surrogate host translates the standardized protocol to the proprietary protocol and vice versa. It acts as service provider to the IP based network. Service architectures for sensor networks are part of the sensor application and, in contrast to the event-driven node application, are based on client-server principle.

IV. CONCEPT OF A SOFTWARE-ARCHITECTURE FOR WIRELESS SENSOR NETWORKS

Fig.3 shows an example of simple service architecture applicable to a sensor network. In this special case, the client wants to acquire information about the surface conditions in the area of interest. First, the client requests the surrogate proxy via standardized protocols for the surface profile of a

part of the observed area. The proxy communicates with the distributed nodes using a proprietary protocol. Nodes located in the target area try to determine the surface profile using cooperative algorithms and send it to the proxy. The proxy translates the information into standardized protocols and sends it back to the client.

The different requirements and objectives for sensor networks described in Sections II and III can only be achieved by the use of a flexible architecture of the node software. Therefore, node software is divided into three software parts as shown in Fig.2.

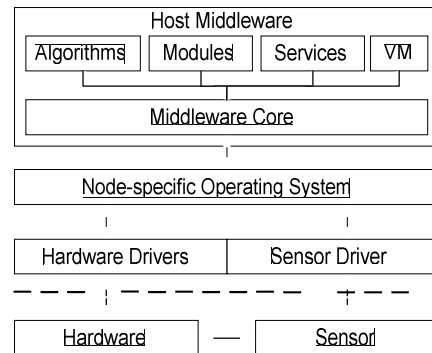


Fig.2 Structure of a Node Application

The main objective of our architecture is the separation of functional blocks in order to increase flexibility and enhance scalability of sensor node software. Therefore, we separate the OS-layer into *Node-specific Operating System* and a *Driver Layer* which contains at least one *Sensor Driver* and several *Hardware Drivers*, such as timer driver and RF driver. The *Node-specific Operating System* handles device-specific tasks e.g., boot up, initialization of hardware, memory management, and process management as well as scheduling. *Host Middleware* is the superior software layer. Its main task is to organize the cooperation of distributed nodes in the network. *Middleware Management* handles four optional components, which can be implemented and exchanged according to a node's task. *Modules* are additional components that increase the functionality of the middleware. Typical modules are routing modules or security modules. *Algorithms* describe the behavior of modules.

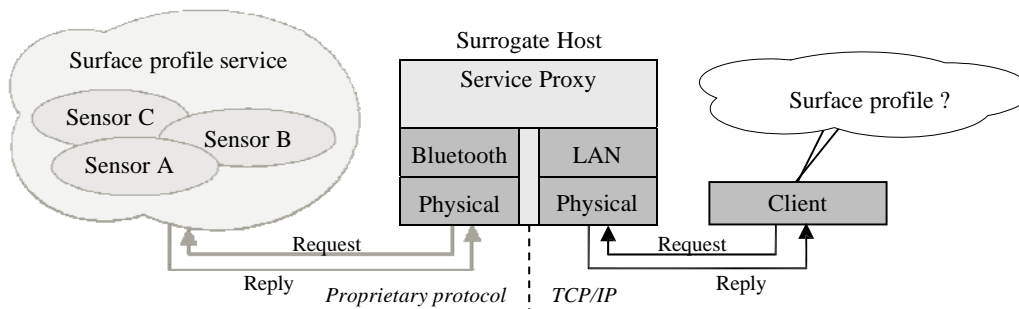


Fig.3 Example of Surrogate Architecture in Sensor Networks

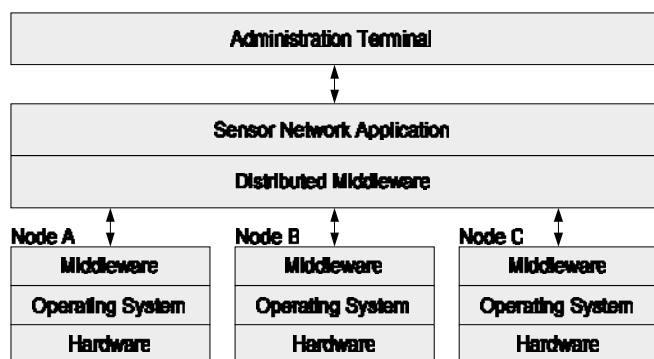


Fig.4 Structure of a Sensor Network

For example, the behavior of a security module can vary if the encryption algorithm changes. The *services* component contains the required software to perform local and cooperative services. This component usually cooperates with other nodes to fulfill its task. *Virtual Machines (VM)* enable an execution of platform independent programs.

Fig.4 shows the expansion of the proposed architecture to a whole sensor network from the logical point of view. Nodes can only be contacted through services of the middleware layers. They do not perform any individual tasks. The *Distributed Middleware* coordinates the cooperation of services within the network. It is logically located in the network layer but physically exists in the nodes. All layers together in conjunction with their configuration compose the *sensor network application*.

The *Administration-Terminal* is an external entity to configure the network and evaluate results. It can be connected to the network at any location.

## V. SOFTWARE DEVELOPMENT DESIGN FLOW

All functional blocks of the described architecture are represented by *components* containing real source code and a description about dependencies, interfaces, and parameters. One functional block can be rendered by alternative components. These components are pre-defined in libraries.

Fig.5a shows the development process of sensor node software. First, for each functional block the components must be identified and included. During design phase, the chosen components are interconnected and dependencies are resolved. During this phase, interface as well as parameter optimization is done and final source code is generated. Additionally, logging components can be included to monitor runtime behavior. Next, during compilation process, the executable is created. Finally, during evaluation phase, the created node application can be downloaded to the node and executed. Considering the monitoring results an improved design cycle can be started. As a result of the design flow, optimized node application software is produced. The node application consists of special tailored parts only needed by the specific application of the node (Fig.5b).

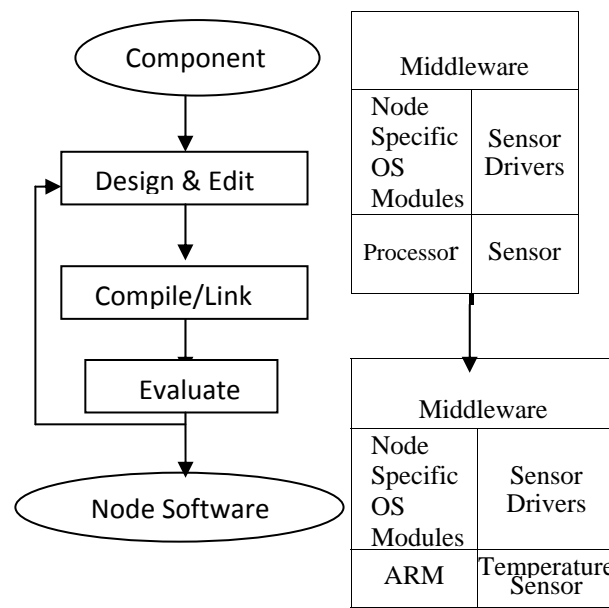


Fig.5 a) Development Process of Node Software,  
b) Example of Node Software with Optimized Interfaces

Optionally, the software components in a node can be linked together statically or dynamically. Statically linking facilitates an optimization of interfaces between several components within a node. This optimization is called *software scaling*. It performs in faster and smaller programs. A dynamic link process is used for components exchanged during runtime e.g., algorithms downloaded from other nodes. This procedure results in system-wide interfaces with significant overhead.

## VI. CONCLUSION

Based on the requirements of sensor networks, this article describes aspects of software engineering. The main objective is the simplification of development of service applications for wireless sensor networks. A key issue is to separate the software from underlying hardware and to divide the software into functional blocks. The presented software architecture and design flow facilitates the programming on high abstraction layers.

Our current research activities concentrate on the realization of the proposed architecture embedded in a framework. It simplifies the development of sensor-, node-, and sensor network applications. Besides that, it provides functionalities to configure and manage the whole network, whereby the scalability and portability of applications increases.

REFERENCES

- [1] G. Coulson, "What is reflective middleware?", URL: <http://dsonline.computer.org/middleware/RMarticle1.htm>, *DS Online*, 2003.
- [2] P. Levis, D. Culler, "Maté: a tiny virtual machine for sensor networks", in *Proc. of ACM Conference on Architecture Support for Programming Languages and Operating Systems (ASPLOS)*, Oct. 2002.
- [3] J. Hill et al., "System architecture directions for networked sensors", in *Proc. of the Ninth International Conference on Architectural Support for Programming Languages and Operating Systems*, Nov. 2000.
- [4] P. Meas, "Concepts and experiments in computational reflection", *PhD Thesis*, Vrije University Brussel, 1987.
- [5] K. Römer, O. Kasten, F. Mattern, "Middleware challenges for wireless sensor networks", *Mobile Computing and Communications Review*, vol. 6, no. 2, 2002.
- [6] P. Rentala, R. Musunuri, S. Gandham, U. Saxena, "Survey on sensor networks", in *Proc. of International Conference on Mobile Computing and Networking*, 2001.
- [7] J. Waldo, *The Jini™ specification*, 2<sup>nd</sup> Edition, Addison-Wesley, 2001.
- [8] „The Jini™ technology surrogate architecture overview“, Sun Microsystems, 2001.
- [9] Open Service Gateway Initiative, URL: <http://www.osgi.org/about/mission.asp>
- [10] M. Román et al., "Gaia : a middleware infrastructure to enable actives spaces“, Digital Computer Labs, University of Illinois, 2002.
- [11] D. Culler, "Tiny OS – a component-based OS for the networked sensor regime“, URL: <http://webs.cs.berkeley.edu/tos/>, 2003.
- [12] A. Perrig, D. Culler et al., "SPINS: Security protocols for sensor networks", in *Proc. of the Seventh Annual International Conference on Mobile Computing and Networking*, July 2001.
- [13] K. Geihs, "Middleware Challenges Ahead", *IEEE Computer*, June 2001, S. 24-31.
- [14] D. Rakhmatov, S. Vrudhula, C. Chakrabarti, „Battery-conscious task sequencing for portable devices including voltage/clock scaling“, in *Proc. of the 39th Design and Automation Conference*, New Orleans, 2002.
- [15] J.M. Kahn, R.H. Katz, K.S.J. Pister, "Next century challenges: mobile networking for smart dust", in *Proc. of the ACM MobiCom '99*, Washington, USA, 1999, pp. 271-278
- [16] D. Culler, E. Brewer, D. Wagner, "A Platform for WEbS (wireless embedded sensor actuator) systems", *Technical Report*, University of California, Berkeley, 2001
- [17] Jan Rabaey, et.al., "PicoRadio Supports Ad Hoc Ultra-Low Power Wireless Networking", *IEEE Computer*, pp. 42-48, July 2000
- [18] G.J. Pottie, W.J. Kaiser, "Wireless integrated network sensors", *CACM*, Vol. 43, Issue 5, pp. 51-58, 200
- [19] EYES- Energy efficient Energy-Efficient Sensor Networks, <http://eyes.eu.org>
- [20] I.F. Akyildiz, W. Su, Y. Sankarasubramaniam, and E.Cayirci, "A Survey on Sensor Networks", *IEEE Communications Magazine*, pp. 102- 114, August 2002
- [21] P. Rentala, R. Musunuri, S. Gandham, U.Saxena, "Survey on Sensor Networks", Technical Report UTDCS-10-03, University of Texas, <http://www.utdallas.edu/~gshashi/survey.pdf>
- [22] X. Hong, K. Xu, M. Gerla, "Scalable Routing Protocols for Mobile Ad Hoc Networks", *IEEE Network Magazine*, July/August 2002
- [23] E. M. Royer, "A Review of Current Routing Protocols for Ad Hoc Mobile Wireless Networks", *IEEE Personal Communications*, April 1999
- [24] L. Zhou, Z. J. Haas, "Securing Ad Hoc Networks", *IEEE Network Magazine*, 13(6), November/December 1999