

# Design Optimization of Air Intake System (AIS) of 1.6L Engine by Adding Guide Vane

D.Ramasamy, Zamri.M, S. Mahendran, S.Vijayan

**Abstract**—Air intake system and filter play major role in getting good quality air into automobile engine. It improves the combustion efficiency and also reduces air pollution. This paper focuses on optimizing the geometry of an intake system in automobile industry to reduce the pressure drop and enhance the filter utilization area by adding guide vane. 3D viscous Computational Fluid Dynamics (CFD) analysis was carried out for an existing model to understand the flow behavior through the intake system, air filter geometry and ducting. Results obtained from CFD analysis of the existing model showed good improvement. Based on existing model CFD results, geometrical changes like guide vane placement in inlet plenum of the filter, optimization of mesh size, removal of contraction in clean pipe of intake system etc are carried out, to improve the flow characteristics. The CFD analysis of the optimized model was again carried out and the results showed good improvement in flow behavior. By using 3D CFD analysis, optimal design of the intake system for an automobile engine is achieved with considerable reduction in development time and cost.

**Index Terms**—Air intake system, CFD, optimization, Automobile Engine.

## I. INTRODUCTION

The main function of an air intake system is to supply the engine with clean air with correct amount for the required air to burn in the manifold chamber. The intake system of an engine has three main functions. Its first and usually most identifiable function is to provide a method of filtering the air to ensure that the engine receives clean air free of debris. Two other characteristics that are of importance to the engineers designing the intake system are its flow and acoustic performance. The flow efficiency of the intake system has a direct impact on the power the engine is able to deliver. The acoustic performance is important because government regulations dictate the maximum air mass flow level that vehicles can make during a pass-by test. The speed of air generated by the intake system can be a significant contributor to this pass-by filter and separated flow. It may be noted that since the loss pressure from the intake duct towards atmosphere, this paper assumes the inlet is at the intake manifold and air filter duct and the outlet is at atmosphere or environmental pressure [1] [2].

Manuscript received October 12, 2009. This work was supported in part by Universiti Malaysia Pahang.

D. Ramasamy, S. Mahendran, Zamri.M and S.Vijayan is with Faculty of Mechanical Engineering, Universiti Malaysia Pahang, 26300 Pekan, Pahang, Malaysia (phone: +609-4242221 Fax: +609-4242202; e-mail: deva@ump.edu.my).

To increase the performance of the Proton Waja, (Malaysian National car) combustion, it is required for the air to be as clean as possible in order for the engine to be as efficient as possible. Hence the air must in some way be “cleaned” before it enters the combustion chamber. The system that cleans the air and guides it into the cylinders is called an Air Intake System (AIS). The AIS may be divided into three main parts: an inlet and intake section in which the incoming “dirty” air is guided into, a filter-box section where a filter is located that cleans the polluted air and hinders soot and other particles from entering the cylinders, and an inlet to the engine where the clean air is guided to the cylinders. Air enters the filter through dirty pipe and inlet side plenum, which guides the flow uniformly through the filter media. Optimum utilization of filter can significantly reduce the cost of filter replacements frequently and keep the filter in use for longer time. To optimize intake system and filter duct area, understanding of flows and pressure drop through the system is essential. Computational Fluid Dynamics (CFD) is considered to be the most cost effective solution for flow analysis of intake system along with filter media. This paper focuses on the optimization of the 1.6L engine air intake system and, with and without guide vane placement on the filter duct media by CFD analysis results.

The geometry of the intake’s optimum performance is related to what is generally well known as a loss coefficient, typically identified by  $K_L$ , which represents the fraction of the dynamic head lost in the duct. This loss can be easily corrected or compensated for by proper design of the inlet duct [3]. Another phenomena is the s-duct flow, the flow in such as diffusing s-ducts Fig. 1 is complex in nature due to effects arising from the offset between the intake plane and engine face plane. As the flow moves on through the duct it would perhaps be expected that a similar motion in the opposite sense be initiated at the second bend. However by this stage the low energy flow is largely on the outside wall relative to the second bend and is not driven back circumferentially [4].

One of the most significant drawbacks of such geometry is the appearance of a separated boundary layer located in the curve, which causes decrease of the total pressure of the gas entering the system. Moreover, the strong curve is responsible for the development of a secondary flow composing of counter rotating vortices and responsible for flow distortions. Both aspects significantly degrade the performance of the system. Consequently, it is highly desirable to avoid the boundary layer separation [5].




Fig. 1 Diffusing s-ducts with guide vane [4]

A research shows that the design of guide vanes for use in expanding bends was investigated both experimentally and numerically. The primary application in mind is the use of expanding corners in wind-tunnels for the purpose of constructing compact circuits with low losses. The experimental results demonstrated that a suitably designed guide vanes give very low losses and retained flow quality even for quite substantial expansion ratios [6].

## II. MODELING

Fig. 2 and Fig. 3 shows the model of intake system and filter. In order to save the CFD computational time and cost, trivial geometric details that are not important from fluid flow point of view, such as fillets, blends stiffeners and steps are avoided in the model. All the above-mentioned, so called a cleaned geometry was obtained from solid model. The modeled AIS is assumed to be driven under standard environmental condition neglecting altitude changes.

CFD is a computerized method that is widely used in the car industry to study e.g. the aerodynamics of a car and combustion processes but is also applicable in other industries such as the nuclear power and pharmaceutical industry. It divides the computational domain into small control volumes, known as cells and in these cells all the equations that described the flow field of interest are solved and explanation about flow around the car body. Together with predetermined values at the boundaries or initial conditions the equations in the cells are solved [7] [8].

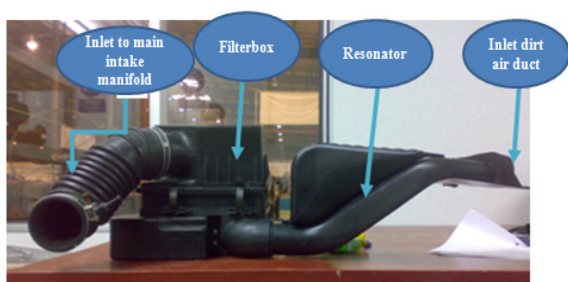


Fig. 2 Existing model of AIS proton Waja 1.6



Fig. 3 AIS located under the bonnet of Waja 1.6

Considering the CFD analysis a CAD model is developed and mimicking the actual parts in the AIS. Fig. 4 shows the exploded view of the AIS in CAD.

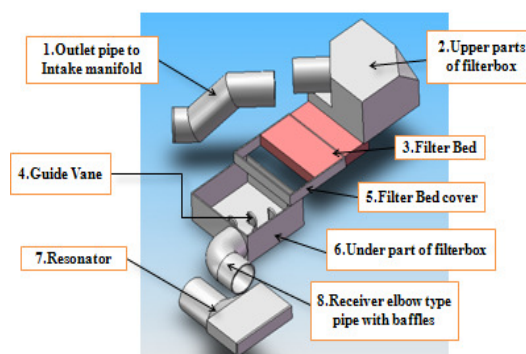


Fig. 4 CAD model of AIS

## III. METHODOLOGY

Air was used as fluid media, which was assumed to be steady and incompressible. High Reynolds number k-ε turbulence model was used in the CFD model. CFD generally solves fluid motion by solving the Navier-Stokes equation of mass, momentum and energy equation. The three equations can be written in the conservation form as follows:

$$\frac{\partial \rho}{\partial t} + \frac{\partial}{\partial x_k} (\rho u_k) = 0 \quad (1)$$

$$\frac{\partial \rho u_i}{\partial y} + \frac{\partial}{\partial x_k} (\rho u_i u_k - \tau_{ik}) + \frac{\partial P}{\partial x_i} = S_i \quad (2)$$

$$\frac{\partial (\rho E)}{\partial y} + \frac{\partial}{\partial x_k} ((\rho E + P) u_k + q_k - \tau_{ik} u_i) = S_k u_k + Q_H \quad (3)$$

where  $u$  is the fluid velocity,  $\rho$  is the fluid density,  $S_i$  is a mass-distributed external force per unit mass,  $E$  is the total energy per unit mass,  $Q_H$  is a heat source per unit volume,  $\tau_{ik}$  is the viscous shear stress tensor and  $q_i$  is the diffusive heat flux.

This turbulence model is widely used in industrial applications. The equations of mass and momentum were solved using SIMPLE algorithm to get velocity and pressure in the fluid domain. The assumption of an isotropic turbulence field used in this turbulence model was valid for the current application. The near-wall cell thickness was calculated to satisfy the logarithmic law of the wall boundary. Other fluid properties were taken as constants. Filter bed media of intake system were modeled as porous media using coefficients. For porous media, it is assumed that, within the volume containing the distributed resistance, there exists a local balance everywhere between pressure and resistance forces such that the porosity were defined as 85%. Fig. 5 shows the CFD model of the AIS system.

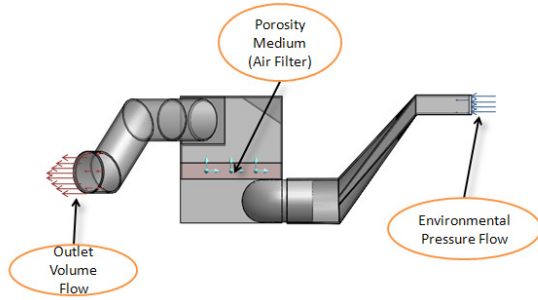


Fig. 5 AIS in CFD model

It is evident that from the optimal design of engine intake extensions that the intake, when incorporated as an integral part, would not be of conventional design but contains the necessary inlet air vanes to approach optimum air flow. The actual bend and internal vane settings would be optimized using computer software to obtain the maximum uniform flow and minimize the value of  $K_L$ . The most common method used to determine these head losses or pressure drops is to specify the loss coefficient,  $K_L$  which is defined as [23]:

$$K_L = h_{L\ minor} \cdot \frac{2g}{v^2} = \frac{\Delta p}{\frac{1}{2}\rho v^2} \quad (4)$$

A guide-vane section was designed with the aim of minimizing the pressure drop for flow in a 90-deg corner. A central part of the design process was to use potential flow calculations in order to obtain vane geometry such that the velocity distribution on the suction side replicates that of a chosen single airfoil at the angle of attack for maximum lift/drag in a straight free stream. The choice was based on proven good drag characteristics at low Reynolds numbers. For the design of the pressure-side velocity, distribution advantage of the expansion in the middle part of the cascade was taken to obtain a high pressure coefficient on the pressure side, as compared to the single airfoil case [9]. Fig. 5 shows the guide vane design implemented in the AIS as the paper examines the flow in a diffusing shaped Proton Waja air intake using computational fluid dynamics (CFD) simulations.

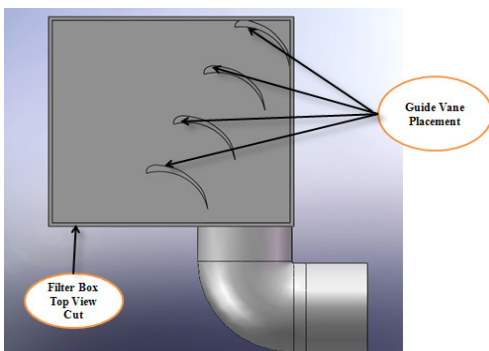


Fig. 5 Placement of guide vane in optimized design

The air flowrate required,  $V_a$  can be calculated from equation below for the particular engine speed if the engine displacement is known.

$$V_a = \frac{\eta_V N D_i}{2} (m^3/s) \quad (5)$$

Where,

$V_a$  is the required engine air flowrate,  $m^3/sec$

$\eta_V$  is the engine volumetric efficiency (assumed 85% for normal engine specification)

$N$  is engine speed, rpm

$D_i$  is engine displacement,  $m^3$

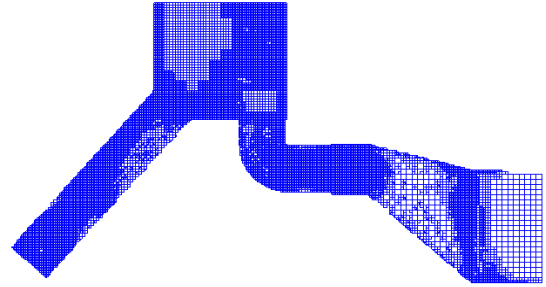


Fig. 6 Mesh analysis for AIS with guide vane

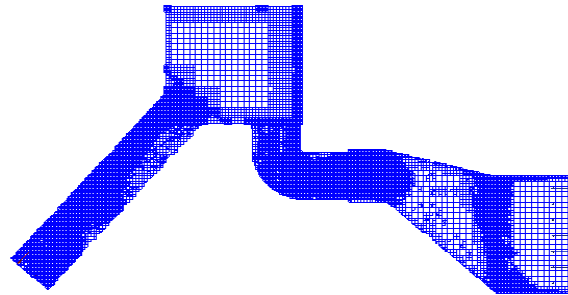


Fig. 7 Mesh analysis for AIS without guide vane

The mesh analysis shows top view of the AIS. The analysis is to do the improvement on the existing model as in Fig. 6. After the improvement was the done to capture the flow inside the system, the mesh of the final CFD analysis of the AIS is as in Fig. 7. The improvement mesh captures more accurately the presence of air at the guide vane wall surface.

#### IV. RESULTS

The results are compared for condition of no guide vane and with the guide vane attached. The first being the pressure drop as shown in Table 1.

Table 1 Pressure Drop in AIS With and Without Guide Vanes

Speed of air flow	Pressure of air for AIS Without Guide Vane (Pa)		Pressure of air for AIS With guide vane (Pa)	
	Intake	Outlet	Intake	Outlet
1000rpm	101322	101295	101322	101299
2000rpm	101313	101211	101313	101228
3000rpm	101298	101105	101297	101114
4000rpm	101276	100919	101276	100959
5000rpm	101249	100691	101249	100756
6000rpm	101216	100416	101216	100525
7000rpm	101177	100128	101177	100233

The analysis was done with 1000 rpm increment to the maximum performance of the engine at 7000 rpm. A graph was also plotted to see clearly compare the condition tabulated. Fig. 8 shows the pressure drop plot.

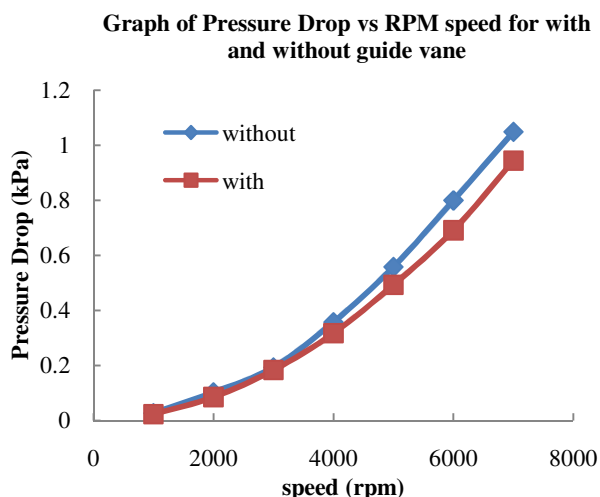


Fig. 8 Pressure plot of simulation

The higher the car accelerator is pushed to wide open throttle hence, the more air enter the combustion chamber. From the graph it shows that the relation with using guide vane and without. If guide vane is used at higher rpm more pressure enters the combustion chamber as the pressure drop is smaller. High pressure in combustion area helps the combustion occur very efficiently then without using the guide vane. At low rpm speed noticed that the pressure drop difference between with and without guide vane are very small hence the graph drawn are similar plotted line.

These shows the guide vane help prevent the loss of pressure, from the post processing data the loss obtain by AIS without guide are bigger than without. This is due to the design of the guide vane that reduces the circulation inside the air box duct, when this happen the loss inside the filter box area is reducing. Propose of the baffle placement on the receiver elbow is to reduce the separated flow when the flow of the air enter the filter box duct media. Hence, the vena Contracta heights will be less, this will help the uniform flow

of air stream the S-shaped of the elbow and make the flow from the intake to the first bend receiver this pressure forces acting on the faster moving core. This cause it to move towards the outside of the bend (port side), where there is an adverse pressure region.

Table 4.2 Percentage improvement

RPM speed	Pressure drop between with and without guide vane, P	Percentage improvement, P%
1000	$(27 - 23) / 27 = 0.1481$	14.81%
2000	$(102 - 85) / 102 = 0.1667$	16.67%
3000	$(193 - 183) / 193 = 0.05181$	5.181%
4000	$(357 - 317) / 357 = 0.1120$	11.20%
5000	$(558 - 496) / 558 = 0.1111$	11.11%
6000	$(800 - 691) / 800 = 0.1363$	13.63%
7000	$(1049 - 944) / 1049 = 0.1001$	10.01%

By placement of guide vane in inlet duct filter media the pipe improved the flow and total pressure drop by an average of 12.01% that is significant in intake system. This shows the pressure drop along the AIS is decreased and the flow is guided by the guide vane to decrease any separation flow and recirculation of the flow affected the system.

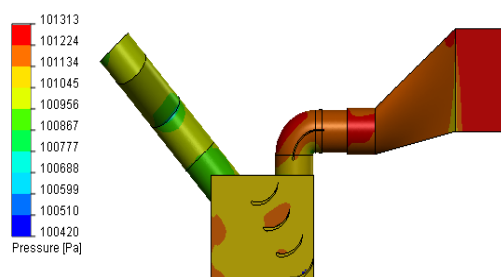


Fig. 9 Bottom view pressure of AIS for with guide vane for 4000rpm

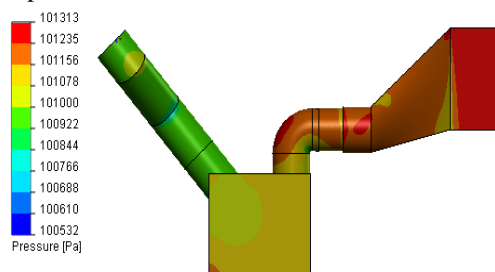


Fig. 10 Bottom view pressure of AIS for without guide vane for 4000rpm

Fig. 9 and Fig. 10 show the pressure drop difference in AIS CFD analysis with and without guide vane. AIS without guide vane experience pressure loss along the intake elbow on the right back wall of AIS. This loss is resultant of the

pressure drop in the model as compared model with guide vane. Analysis in the AIS with guide vane shows the pressure loss experience by the AIS at back wall is decreased. The pressure experience near outlet pipe to intake pipe is increased. This pressure region near the outlet pipe is an improvement of the design that is hoped will help in the performance of engine. Further tests with actual air flow moving in the AIS will show validation of the simulation done in this paper.

## V. CONCLUSION

From this analysis it can be concluded as when there is high pressure number enters the outlet pipe to the intake manifold this means that the pressure in the manifold is closer to atmospheric pressure.

When the pressure drop is decrease air is being quite freely admitted to the engine, which in turn means that more air and fuel is being provided to it, which generates more power.

1. All the above changes incorporated in the design of the guide vane improved overall pressure drop by 12.01% for the rpm speed of 1000 to 7000.
2. Effect of adding more guide vane placement on the critical region may improve the design of AIS even further.
3. Building duct that has more flow features that can guide the air. Actual air flow test is targeted so that a flow validation may be done.

## ACKNOWLEDGMENT

D.Ramasamy would like to thank University Malaysia Pahang for sponsor and financial support for this paper.

## REFERENCES

- [1] S. Das and J. K. Prasad. (2008). Characteristic of a Supersonic Air-Intake with Bleed. Department of Space Engg. & Rocketry, B. I. T, Mesra, Ranchi, India.
- [2] P. Chudý, K. Fialkovský, J. Friedl. (2004). Aerodynamic Analysis of Turbo-prop Engine Air Intake. Czech Technical University Publishing House.
- [3] M.F. Harrison and P.T. Stanev. (2004) Measuring Wave Dynamics in I.C Engine Intake System. School of Engineering, Cranfield University, England.
- [4] Primož Pogorevc, Breda Kegl. (2007). Optimal Design of the Intake System. University of Maribor, Faculty of Mechanical Engineering.
- [5] Kate TAYLOR. Anthony G SMITH, Stuart ROSS, Martin SMITH. (1999). The Prediction of Pressure Drop and Flow Distribution in Packed Bed Filters. Second International Conference on CFD in the Minerals and Process Industries, CSIRO, Melbourne, Australia.
- [6] M. Suzuki and C. Arakawa. (2002). Guide Vanes Effect of Wells Turbine for Wave Power Generator. Department of Mechanical Engineering, The University of Tokyo, Tokyo, Japan.
- [7] Pär Nylander. (2008). CFD Modeling of Water Ingestion in Air Intake System. Lulea University of Technology.
- [8] Ravinder Yerram, Nagendra Prasad, Prakash Rao Malathkar, Vasudeo Halbe, Shashidhara Murthy K. (2006). Optimization of Intake System and Filter of an Automobile using CFD analysis. Quality Engineering & Software Technologies (QuEST), Bangalore, India.
- [9] Semin, Abdul Rahim Ismail, Rosli Abu Bakar and Ismail Ali. (2008). Steady-State and Transient Simulation of Gas Flown Temperature of Intake Port Engine. University Malaysia Pahang, Kuantan, Malaysia.